


**P-200K893M**

Electronic control unit for one or two 230 V up-and-over garage door openers with soft-stop, built-in 433,92 MHz single-channel radio receiver and enclosure.


TECHNICAL DRAWINGS**USER GUIDE**

K893M

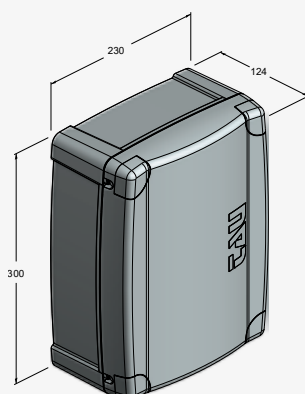

MADE IN
ITALY

WIRING DIAGRAM

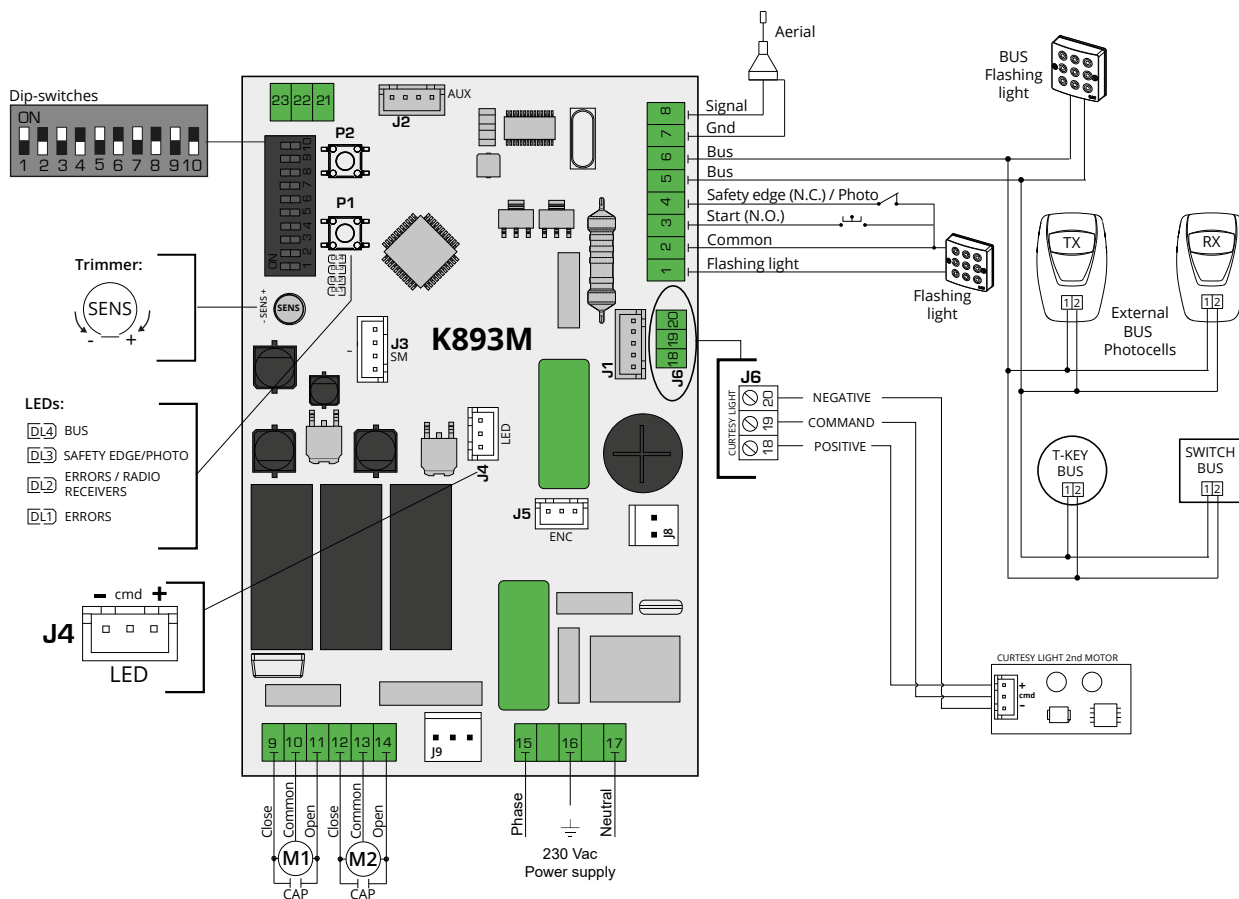

Programmable Functions

K893M

Automatic operation	✓
Semiautomatic operation	✓
Man present functions	
Pre-flashing disable	✓
Gate open led with proportional flashing	
Gate open led	
Programming with TauApp (P-250T-WIFI)	✓
Running with TauOpen 2.0 (P-250T-CONNECT)	✓
Limit switches	✓
Photocell test at start of manoeuvre	
Disable photocell test	
Twin pair of photocells	
Close 5 secs after photocells	
Working time (TL) adjustment	✓
Gate open time (TCA) adjustment	✓
Gate open time (TCA) disable	✓
Delay wing closing	
Electronic force adjustment	✓
Automatic realignment after black-out	
Step-by-step operation (open-stop-close-stop-open)	✓
No reverse in opening manoeuvre	✓

Pedestrian feature

Clock function	✓
Encoder	✓
Built-in radio card	✓
Slow-down	✓
Receiver preset for digital keypads	✓
Expandable memory	✓

Outputs-Inputs

K893M

M1 output	✓
M2 output	✓
Flashing light output	✓
Courtesy light output	✓
Electric lock output	
Gate open LED output	
12 Vdc output for auxiliaries	
24 Vac output for auxiliaries	✓
Internal photocell FTI output	
External photocell FTE output	
Open/close input	✓
Pedestrian input	
Stop input	✓
Open button input	
Close button input	
Sensitive edge input	✓

* It is possible to program its operation through TauApp